


352 - 353

IT EN DE FR ES PT



400 Nm

12

DATI TECNICI / TECHNICAL DATA / TECHNISCHE DATEN
CARACTÉRISTIQUES TECHNIQUES / DATOS TÉCNICOS / CARACTERÍSTICAS TÉCNICAS

CV RCV	i	n ₁ = 2800 min ⁻¹			n ₁ = 1400 min ⁻¹			n ₁ = 900 min ⁻¹					
		n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	IEC B5	IEC B14	NEMA
352	3.74	749	262	21	374	314	12.8	241	313	8.2	71-80-90-100-112-132	100-112-132	140-180
	4.56	614	277	18.6	307	332	11.1	197	332	7.1	71-80-90-100-112-132	100-112-132	140-180
	5.11	548	289	17.3	274	346	10.3	176	345	6.6	71-80-90-100-112-132	100-112-132	140-180
	6.22	450	304	14.9	225	364	8.9	145	364	5.7	71-80-90-100-112-132	100-112-132	140-180
	6.93	404	312	13.8	202	374	8.2	130	374	5.3	71-80-90-100-112-132	100-112-132	140-180
	7.51	373	294	12.0	186	352	7.2	120	352	4.6	71-80-90-100-112-132	100-112-132	140-180
	7.78	360	321	12.6	180	384	7.5	116	384	4.8	71-80-90-100-112-132	100-112-132	140-180
	9.14	306	310	10.4	153	370	6.2	98	371	4.0	71-80-90-100-112-132	100-112-132	140-180
	10.18	275	318	9.5	138	381	5.7	88	381	3.7	71-80-90-100-112-132	100-112-132	140-180
	11.43	245	326	8.7	122	391	5.2	79	391	3.4	71-80-90-100-112-132	100-112-132	140-180
	12.62	222	300	7.3	111	360	4.4	71	360	2.8	71-80-90-100-112	100-112	140-180
	15.37	182	316	6.3	91	379	3.8	59	378	2.4	71-80-90-100-112	100-112	140-180
	17.11	164	324	5.8	82	388	3.5	53	388	2.2	71-80-90-100-112	100-112	140-180
	19.21	146	333	5.3	73	399	3.2	46.9	399	2.0	71-80-90-100-112	100-112	140-180
	24.19	116	308	3.9	58	369	2.3	37.2	368	1.5	71-80-90-100-112	100-112	140-180
29.45	95	325	3.4	47.5	390	2.0	30.6	389	1.3	71-80-90-100-112	100-112	140-180	
32.80	85	330	3.1	42.7	396	1.8	27.4	397	1.2	71-80-90-100-112	100-112	140-180	
36.82	76	338	2.8	38.0	403	1.7	24.4	405	1.1	71-80-90-100-112	100-112	140-180	
353	41.20	68	332	2.5	34.0	396	1.5	21.8	397	0.98	63-71-80-90	90	56-140
	46.20	61	339	2.3	30.3	406	1.4	19.5	405	0.89	63-71-80-90	90	56-140
	54.00	52	311	1.8	25.9	372	1.1	16.7	372	0.70	63-71-80-90	90	56-140
	65.80	42.6	326	1.6	21.3	391	0.94	13.7	391	0.60	63-71-80-90	90	56-140
	73.60	38.2	333	1.4	19.1	398	0.86	12.3	400	0.55	63-71-80-90	90	56-140
	82.20	34.1	341	1.3	17.0	408	0.78	10.9	408	0.50	63-71-80-90	90	56-140
	99.30	28.2	314	1.0	14.1	377	0.60	9.1	375	0.38	63-71-80-90	90	56-140
	120.90	23.2	329	0.86	11.6	393	0.51	7.4	392	0.33	63-71-80-90	90	56-140
	134.70	20.8	336	0.79	10.4	400	0.47	6.7	401	0.30	63-71-80-90	90	56-140
	151.10	18.5	344	0.72	9.3	411	0.43	6.0	410	0.28	63-71-80-90	90	56-140
	189.20	14.8	317	0.53	7.4	383	0.32	4.8	381	0.20	63-71-80-90	90	56-140
	230.30	12.2	342	0.47	6.1	408	0.28	3.9	408	0.18	63-71-80-90	90	56-140
	256.50	10.9	357	0.44	5.5	428	0.26	3.5	429	0.17	63-71-80-90	90	56-140
	287.90	9.7	369	0.40	4.9	440	0.24	3.1	442	0.16	63-71-80-90	90	56-140

DIMENSIONI / DIMENSIONS / ABMESSUNGEN / DIMENSIONS / DIMENSIONES / DIMENSÕES

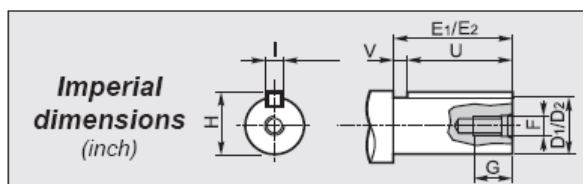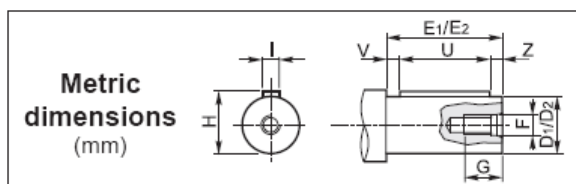

1 Albero entrata / Input shaft / Antriebswelle
Arbre d'entrée / Eje de entrada / Eixo de entrada

CV RCV	D ₁ h6	E ₁	F	G	H	I	U	V	Z
352	24	50	M8	18	27	8	40	5	5
353	19	40	M6	15	21.5	6	30	5	5

1 Albero entrata / Input shaft / Antriebswelle
Arbre d'entrée / Eje de entrada / Eixo de entrada


CV	D ₁	E ₁	F	G	H	I	U	V
352	1.000	1.969	5/16-18	0.709	1.109	0.250	1.500	0.469
353	0.750	1.575	5/16-18	0.709	0.832	0.187	1.000	0.575

2 Albero uscita / Output shaft / Abtriebswelle
Arbre de sortie / Eje de salida / Eixo de saída

CV RCV	D ₂ h6	E ₂	F	G	H	I	U	V	Z
352	28	60	M8	18	31	8	50	5	5
	30	60	M10	22	33	8	50	5	5
353	32	80	M10	22	35	10	70	5	5
	35	80	M10	22	38	10	70	5	5
	38	80	M10	22	41	10	70	5	5
	40	80	M12	28	43	12	70	5	5


2 Albero uscita / Output shaft / Abtriebswelle
Arbre de sortie / Eje de salida / Eixo de saída

CV RCV	D ₂	E ₂	F	G	H	I	U	V
352	1.375	3.150	3/8-16	0.906	1.513	0.312	2.500	0.650
353								




A richiesta / On request / Auf Anfrage / Sur demande / Bajo demanda / Sob consulta

IT EN DE FR ES PT



DIMENSIONI / DIMENSIONS / ABMESSUNGEN / DIMENSIONS / DIMENSIONES / DIMENSÕES

13

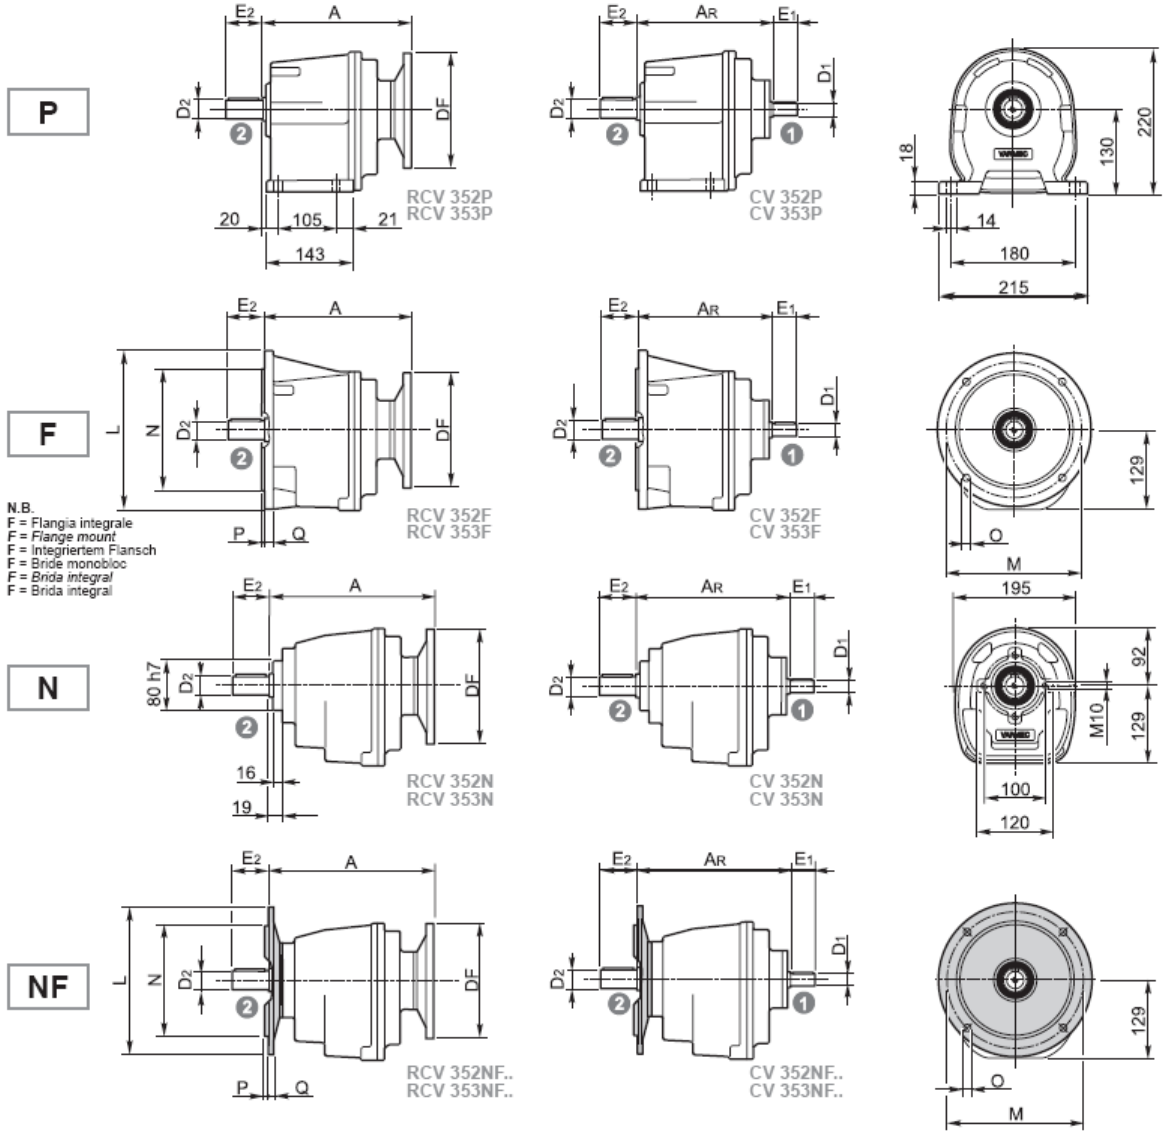

N.B.
F = Flangia integrale
F = Flange mount
F = Integriertem Flansch
F = Bride monobloc
F = Brida integral
F = Brida integral

	L	M	N h8	O	P	Q
NF160	160	130	110	11	3.5	11
NF200	200	165	130	13	3.5	11
NF250	250	215	180	14	4	11
F250	250	215	180	14	4	13

P - F

N - NF

RCV CV	RCV						CV	
	IEC	DF		A	NEMA	DF		A
		(B5)	(B14)					
352	71	160		140	165.1	234	219	
	80	200						
	90	200		224	165.1	229		
	100	250	160					
	112	250	160					
	132	300	200					
353	63	140		56	165.1	229	214	
	71	160		140	165.1	229		
	80	200						
	90	200	140					

RCV CV	RCV						CV	
	IEC	DF		A	NEMA	DF		A
		(B5)	(B14)					
352	71	160		140	165.1	259	244	
	80	200						
	90	200		249	165.1	265		
	100	250	160					
	112	250	160					
	132	300	200					
353	63	140		56	165.1	254	239	
	71	160						140
	80	200		246				
	90	200	140					